
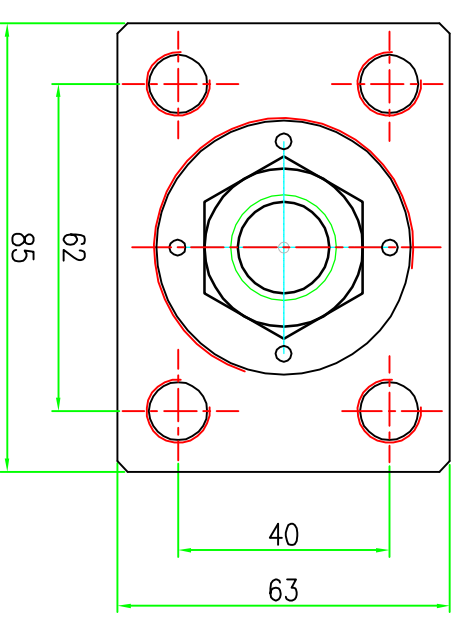
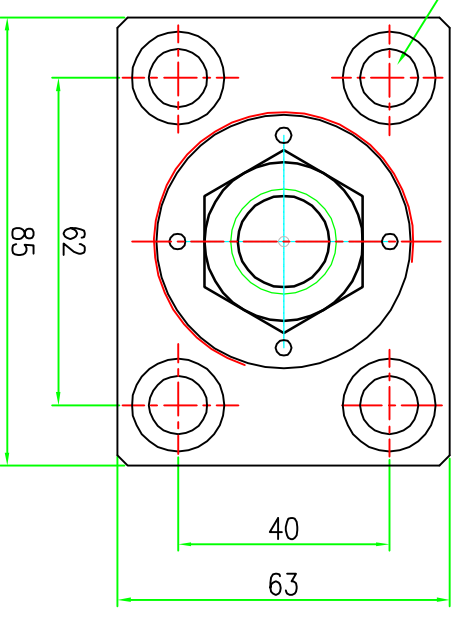
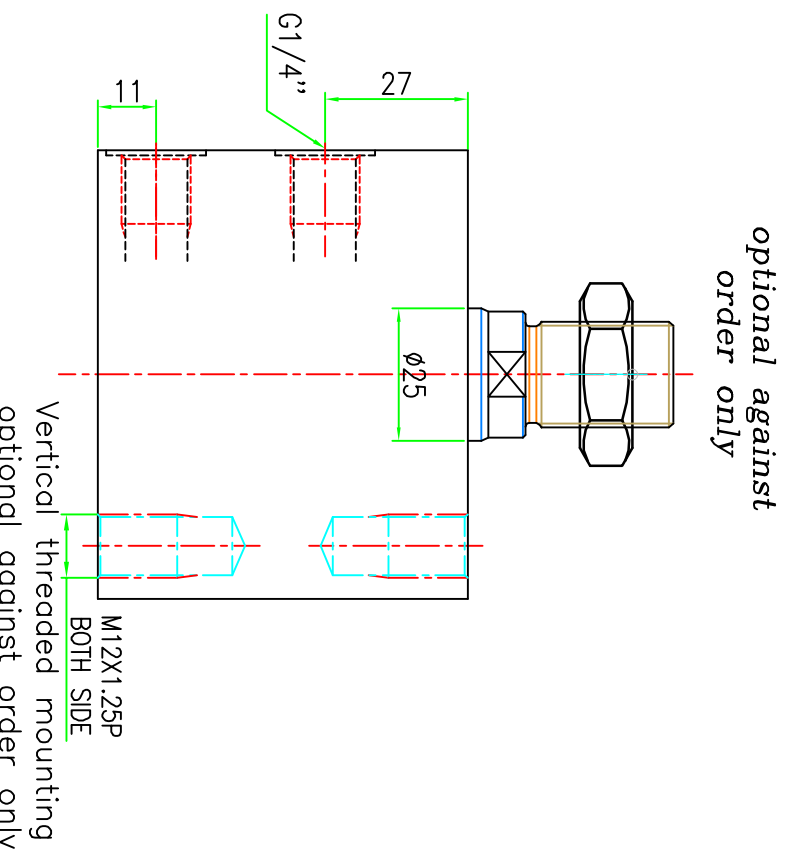


SHORT STROKE (S)

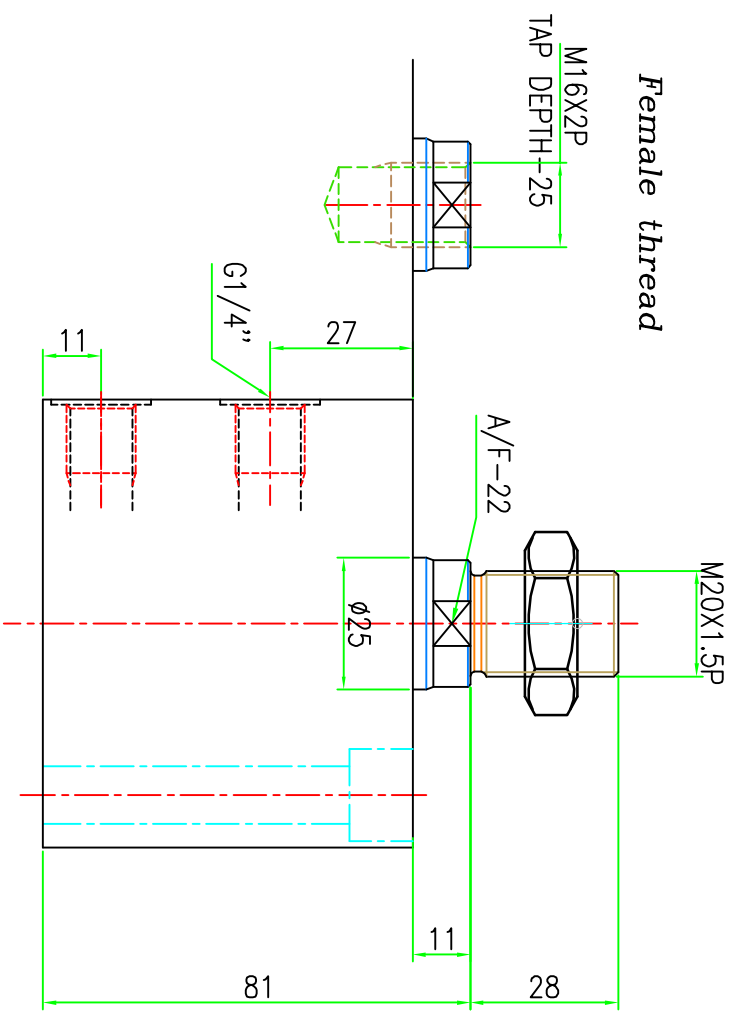

Model NO-Male thread-A31307
Female thread-A31308

Specification:-
Type : Double acting hydraulic cylinder.
Bore dia = 40mm, rod dia = 25 mm
Stroke = 16 mm
Operating pressure : max 250 bar/min 10 bar
Hydraulic oil
Medium
(servo system HLP46/HLP68)

- 1.0 GENERAL
- 1.1 ALL DIMENSIONS ARE IN MM.
- 1.2 DO NOT SCALE THE DRG. IF IN DOUBT ASK.
- 1.3 SUBJECT TO CHANGE FOR IMPROVEMENT.

REVISION				
ZONE	REV	FROM	TO	DATE

SURFACE FINISH		▽▽▽	▽▽▽	▽▽▽	▽▽	▽	~		
Ra value μm		0.025	0.05	0.1	0.2	0.4	0.8	1.2	
GENERAL TOLERANCES WHERE NOT SPECIFIED									
LINEAR - LENGTH OR DIAMETER					ANGULAR-LENGTH IN MM OF SHORT SIDE OF ∠				
0.5-6	6-30	30-120	120-315	315-1000	1000-2000	UPTO 6	6-30	30-120	120-400
±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±1'	±30'	±20'	±10'
SCALE: 1:1									
NAME		DATE		TITLE					
TIRUMAL		22.08.08		BLOCK CYLINDER					
DRAWN		TIRUMAL		DOUBLE ACTING					
CHECKED				MACHINE TYPE					
APPROVED				CUSTOMER:					
GROUP NO:		SUPERCEDED BY		REPLACES					
XXX		-		-					
MATERIAL:		DRAWING NO:		SHEET NO:					
XXX		-		1 OF: 1					